




ASUS VivoBook S300CA-BBI5T01 Battery Replacement

The battery is the device's source of power when not plugged into an outlet. If the device fails to function when it is not plugged into the wall, the battery may need to be replaced.

Written By: Keith Rachels

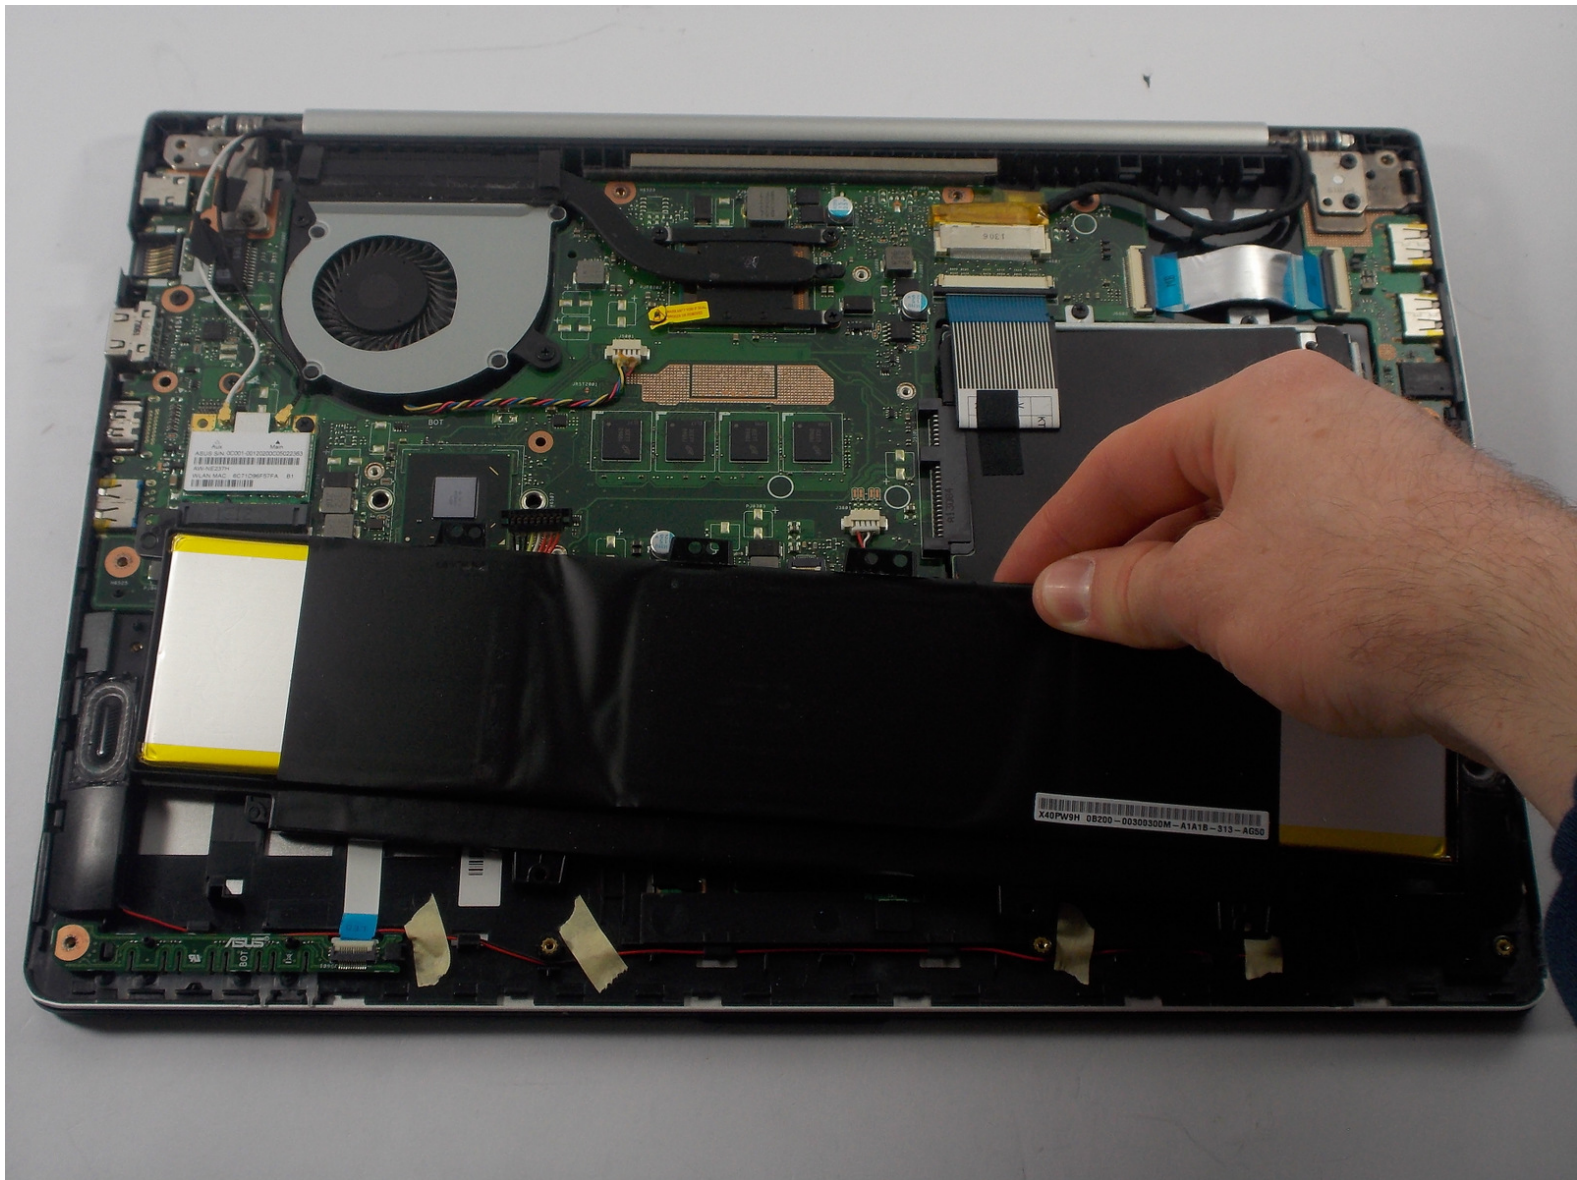

INTRODUCTION

If your laptop is unable to turn on without being plugged into an outlet, it may be suffering from a dead battery. In this guide we will be replacing the battery of the ASUS VivoBook S300CA-BBI5T01 laptop.



TOOLS:


- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery




- Place the laptop upside down so that the bottom panel is facing upwards.

Step 2

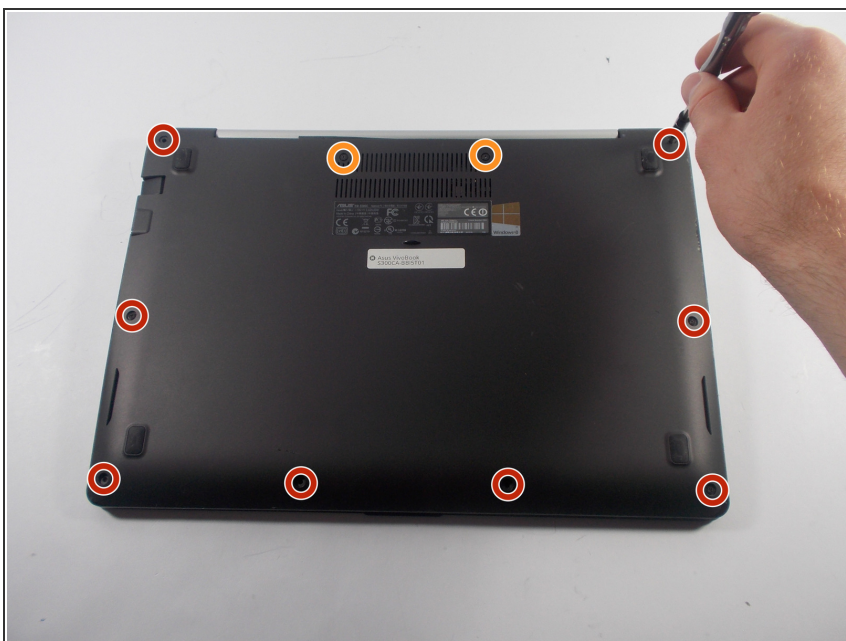


- Unscrew the following 10 screws
 - Eight 5 mm Phillips head screws
 - Two 10 mm Phillips head screws

Step 3

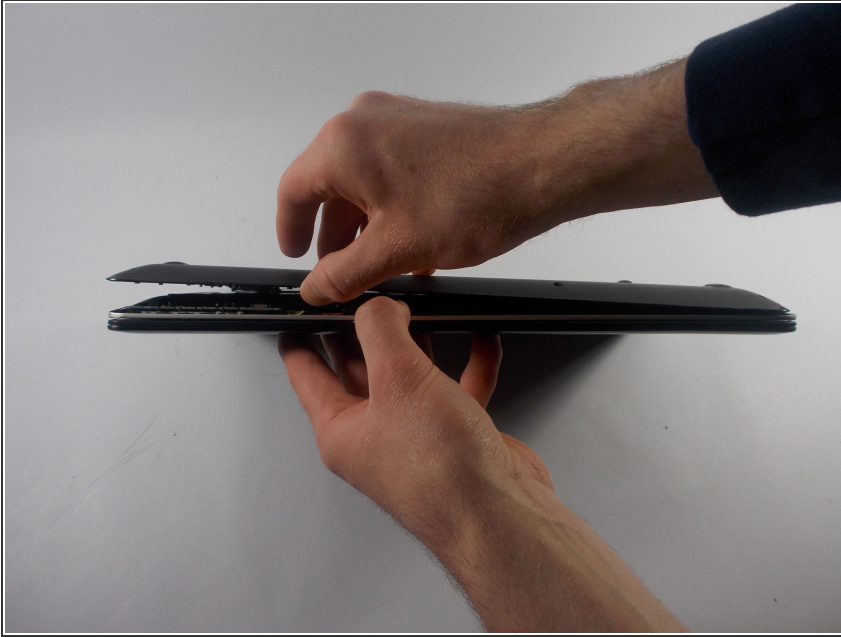


- Carefully peel the panel off of the bottom of the laptop.

Step 4

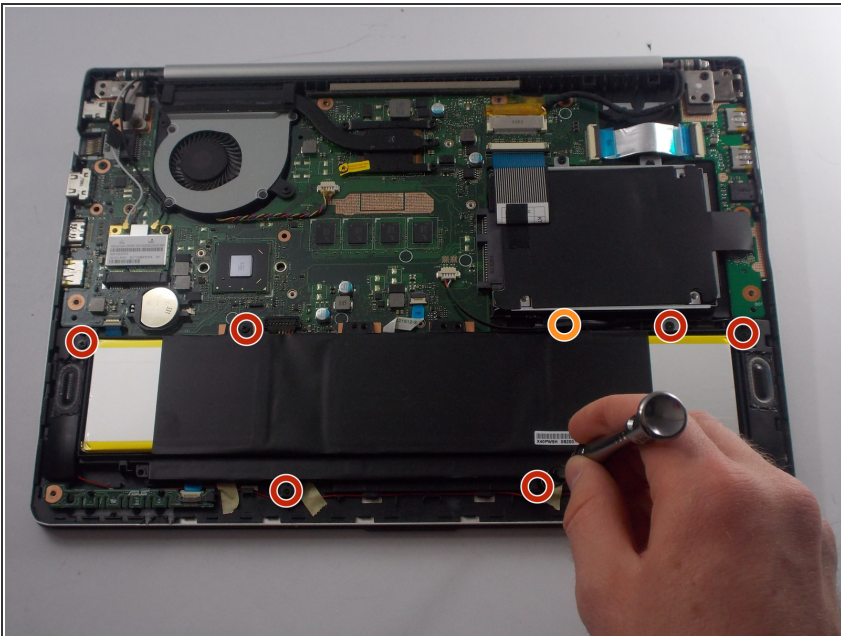


- Remove the 7 screws holding the battery in place.
- Six 3 mm Phillips head screws
- One 5 mm Phillips head screw

Step 5

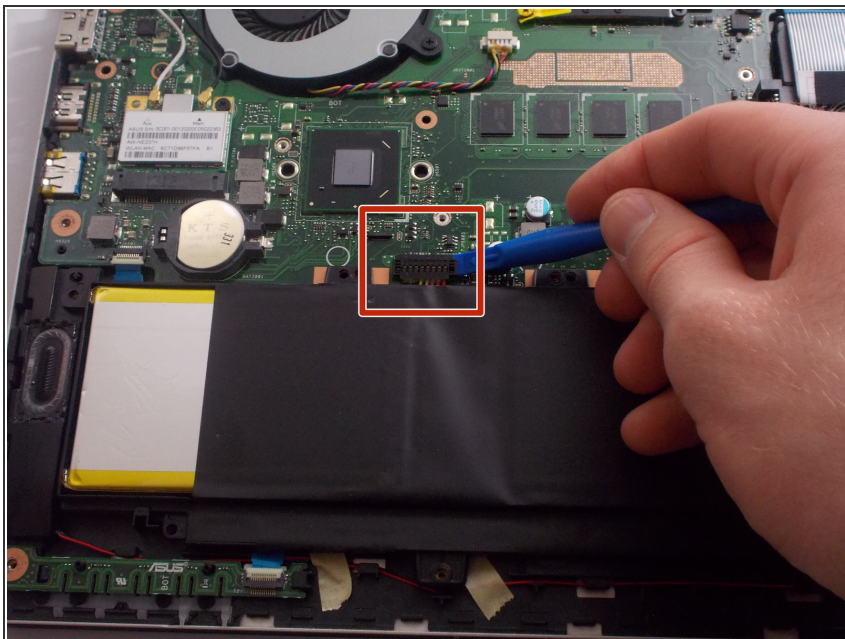

- Disconnect the one flat topped wire connector by carefully using a plastic opening tool to pry up both sides and then lifting the connector from its socket.

Step 6

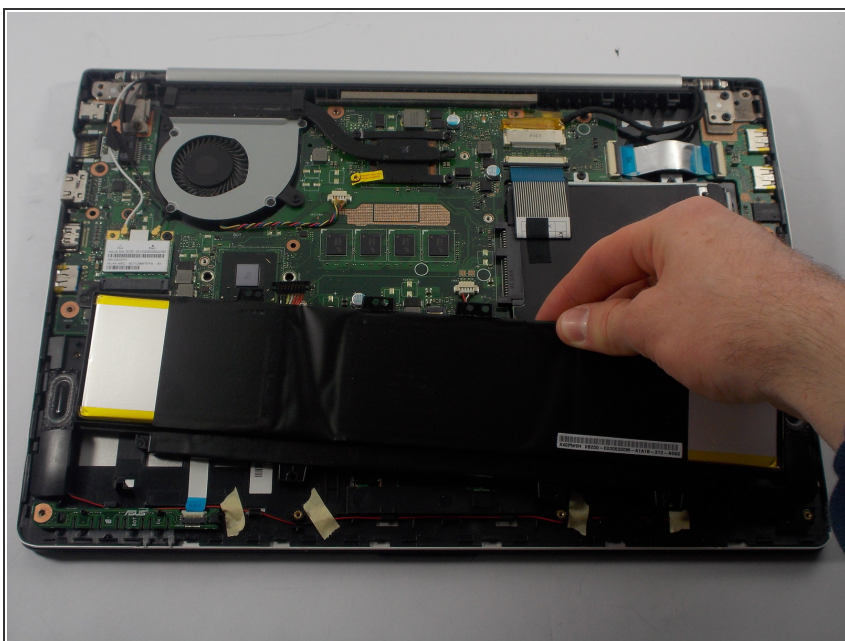

- Slide out the battery.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-17 09:42:07 AM.